


KEYSECURITYBOX

solid as a rock

KSB103

In combination with console KSB 005 or console KSB 106

User manual English

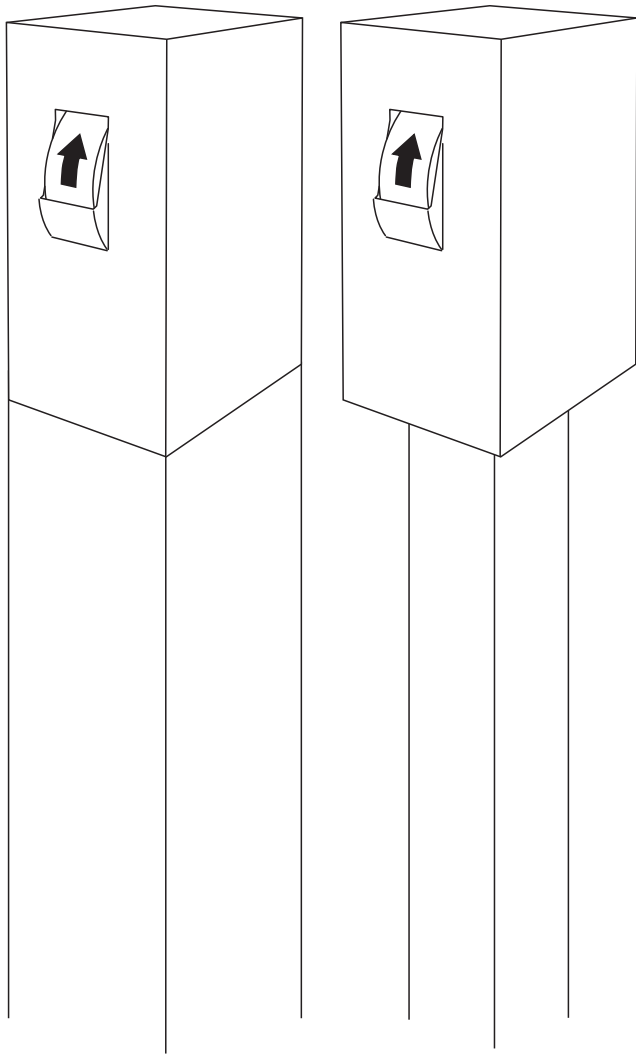

Congratulations on choosing our ultra-reliable KeySecurityBox, the ideal solution for keys and keycards. The KeySecurity-Box is extremely durable and, thanks to the range of models, there's always a solution to meet your need.

You have chosen the KSB 103. The KSB 103 is intended for installation on a console. As described below, there are two types of consoles on which you can install your KeySecurityBox 103. These are the KSB 005 and 106.

NB If need be - ask your local hardware store about the installation material and when drilling always make sure you avoid pipes or wires.

Specifications

Model: KSB 103

Dimensions: 215 x 215 x 395 mm

Colour: RAL 9006

Box content KSB 103

- 1 x KeySecurityBox
- 1 x floor mat for in the safe
- 4 x Ring $\varnothing$ 50 mm
- 1 x instruction sticker
- 2 x safe key
- 1 x manual

Start with console KSB 005 or 106

If you chose console KSB 005, follow instruction numbers 1 and 2. If you went for console KSB 106, follow instruction numbers 3, 4 and 5.

You will need the following for installation

KSB 005

- At least 100 kg concrete
- 17 mm wrench/spanner
- Spade
- Spirit level
- 2 x steel reinforcing bar (included)




KSB 106

- Pen/pencil
- Anchor bolts or chemical anchors
- Hammer drill with drill
- Wrench/spanner
- Spirit level

1

Installation with console KSB 005

Make a hole in the shape of a pyramid that is at least 50 centimeters deep. Place the steel bars included in the holes in the bottom of the console. Use the spirit level to make sure the console is level and fix it. Dump at least 100 kilograms' concrete according to the specifications of the concrete supplier. Let the concrete harden.

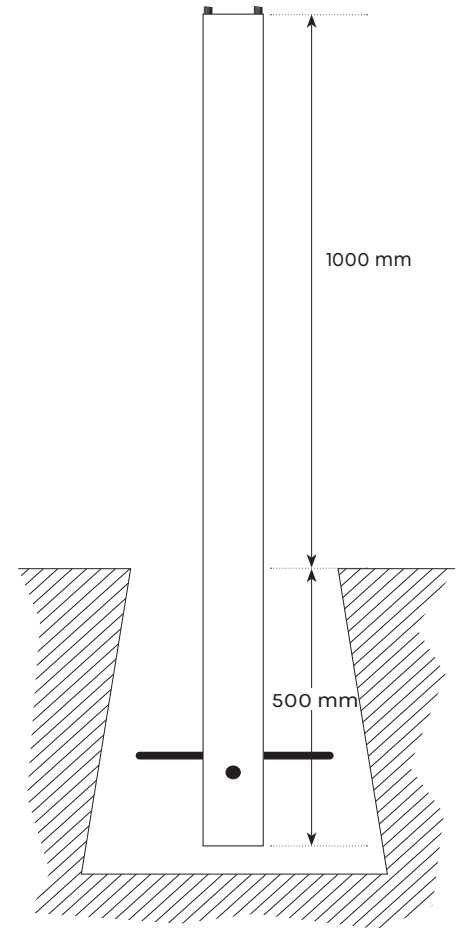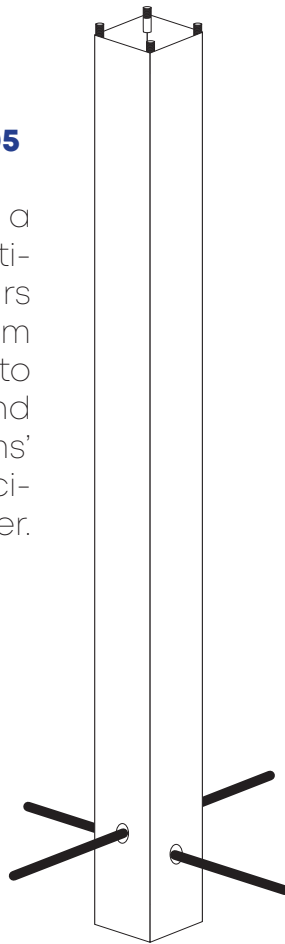
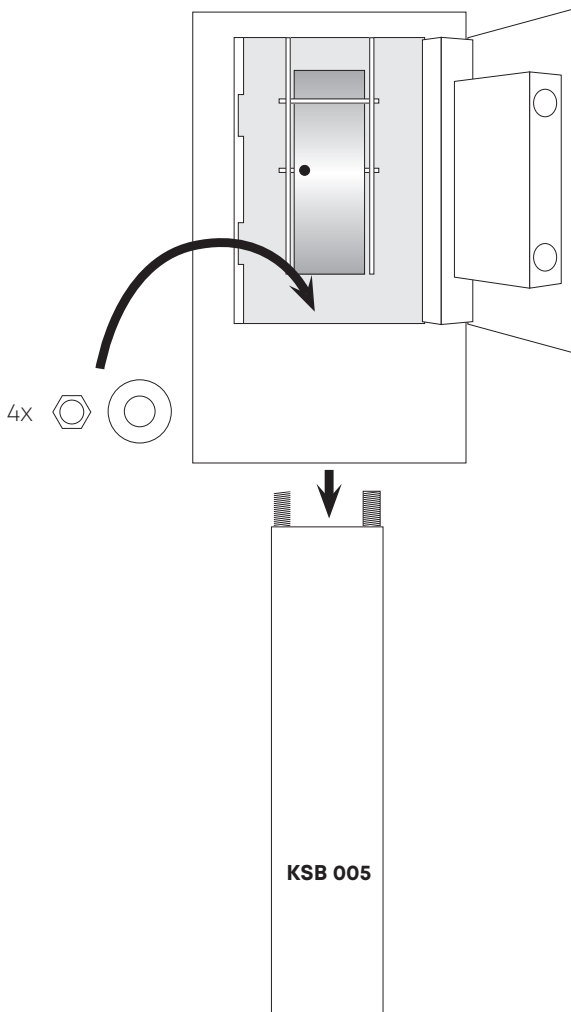
**2**

Place the KeySecurityBox with the bolts and rings on the console KSB 005 and place the floor mat on the base of the box.

3

Installation with console KSB 106

The KSB 106 can be placed on a solid concrete foundation (floor). Draw the drill holes on the floor. Use chemical anchors or anchor bolts (please get some advice from a specialist). Drill holes according to the instructions on the assembly materials. Place the inner bar over the thread ends of the anchors and fix the inner bar with the bolts (make sure it is level).

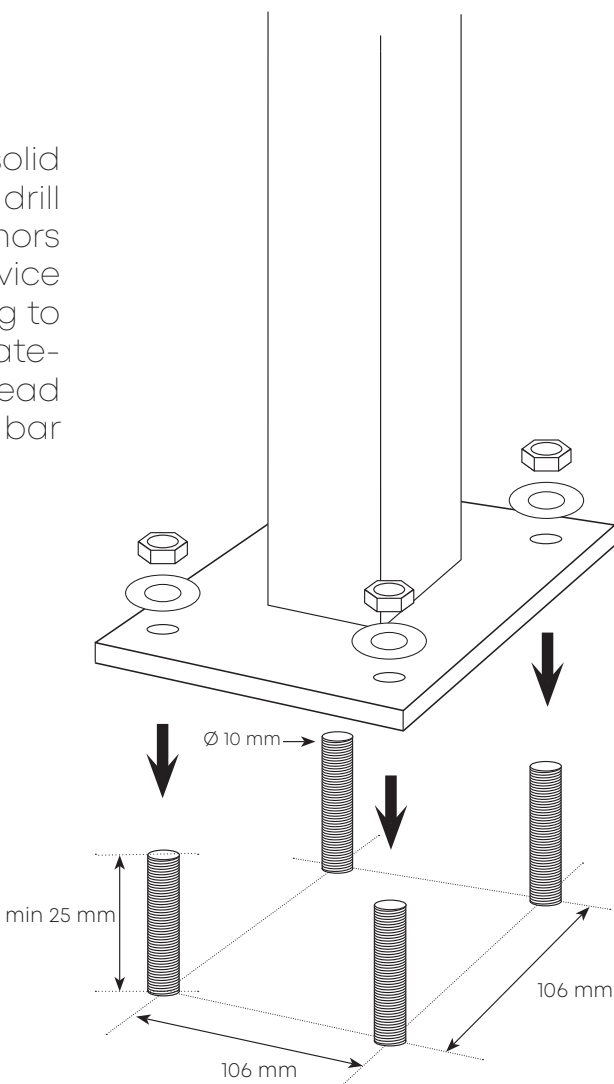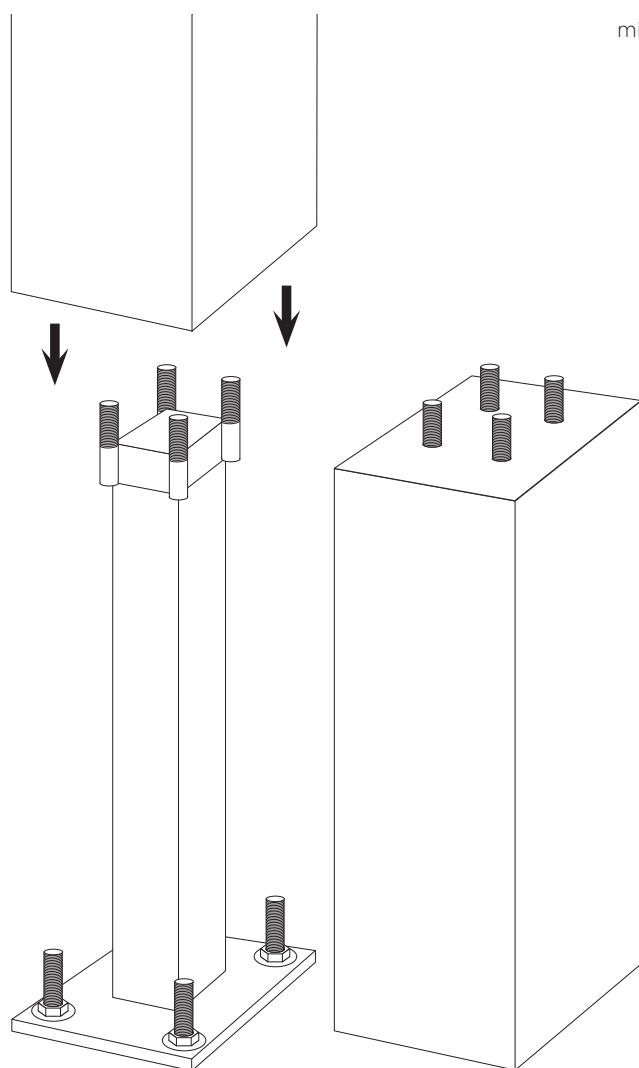



4

Place the covering sleeve over the inner bar.

5

Mount the KeySecurityBox with the bolts and rings on console KSB 106 and place the floor mat on the bottom of the box.

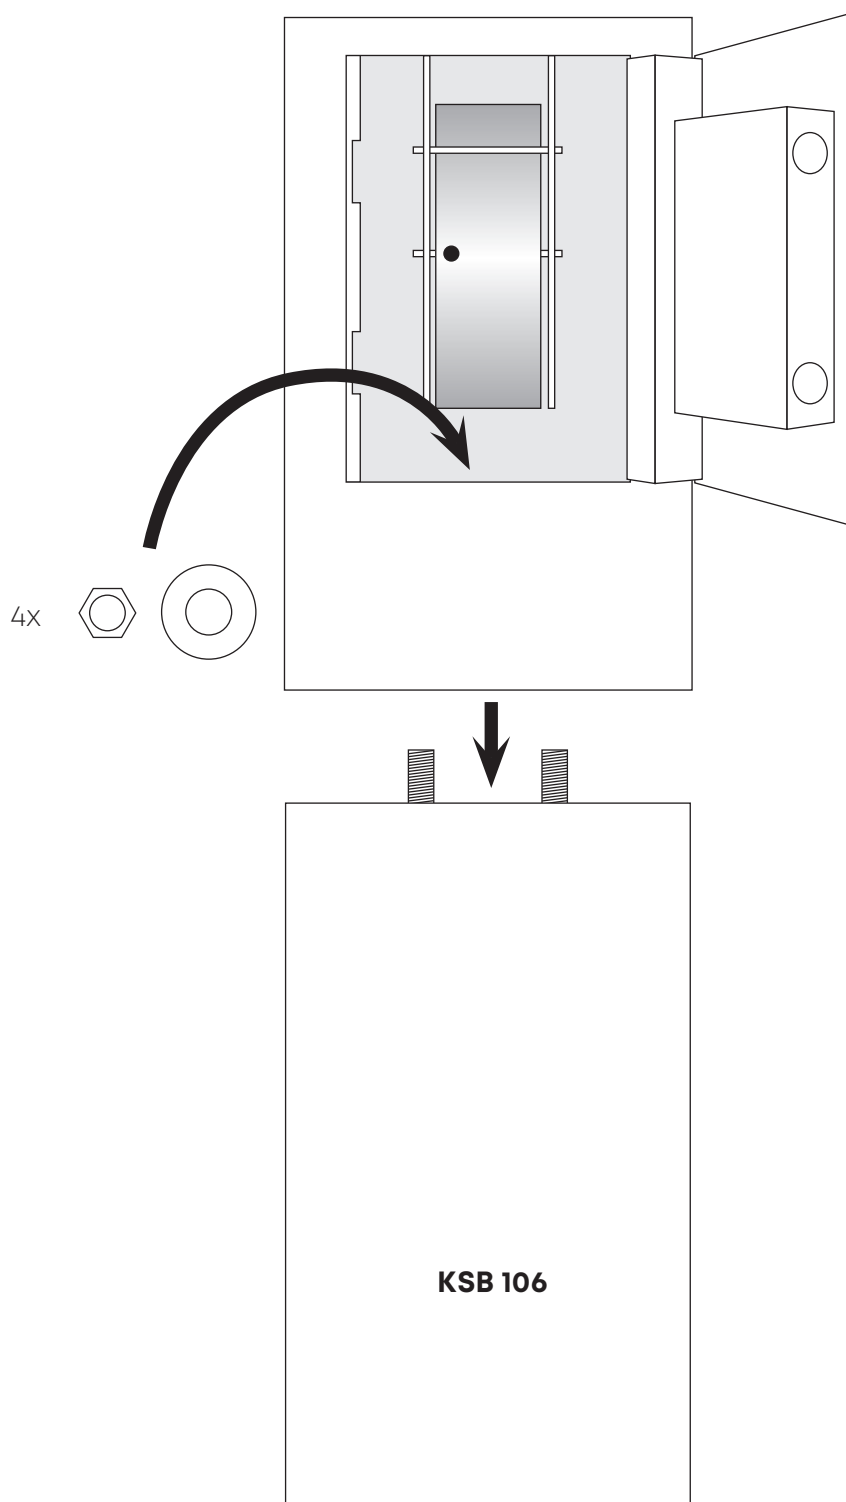

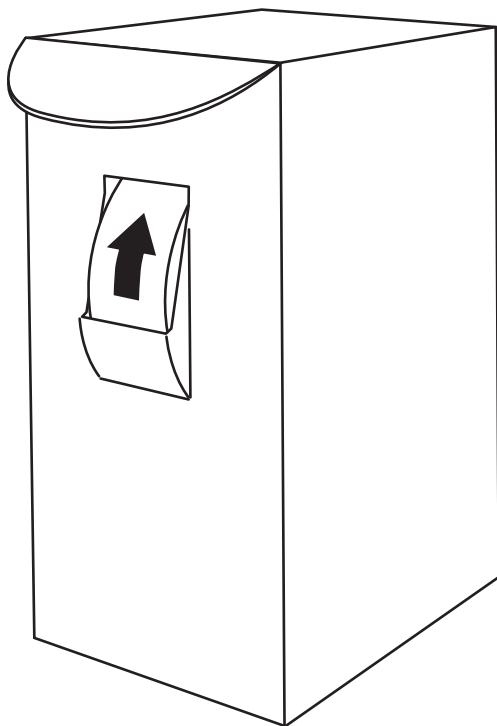

Optional

Place the rain cap to keep the rain out. Make the top of the box grease-free and apply a mounting glue such as Zwaluw High Tack and place the cap and press it so that it fits firmly.


Maintenance

Regularly check whether the drainage holes on the bottom of your KeySecurityBox are open and whether all the bolts are still solid and in place. Treat for possible rust.

Questions?

Ask your supplier, check on:
www.keysecurityproducts.com

or send an email to:
info@keysecurityproducts.com

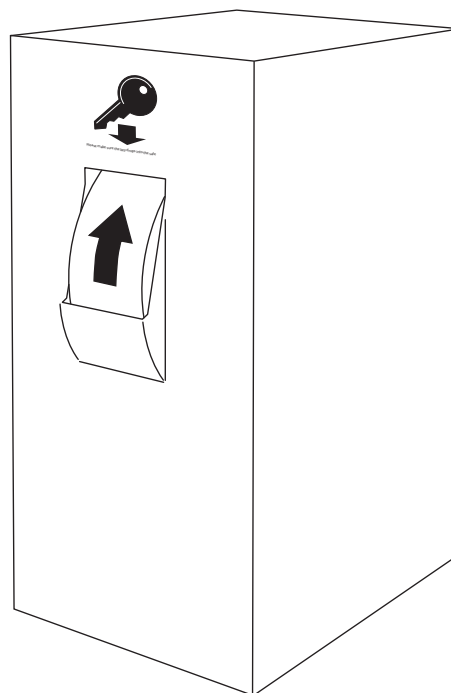

Disclaimer with respect to installation, breakage and theft

The manufacturer and vendor of the KeySecurityBox are not liable for the installation. The installation is easy although we recommend you ask a contractor or other professional to do it for you. The KeySecurityBox is intended for depositing keys and keycards and not for paper and other objects that may get stuck in the deposit wheel. The KeySecurityBox is an anti-theft and anti-breakage box, although with excessive violence theft and breakage are possible. The use is therefore for personal risk and the manufacturer and vendor of the KeySecurityBox are not liable for breakage or theft or physical harm caused by its incorrect use.



© 2021 Dutch Trading Company